


Artistic Skylights conform to and exceed test requirements of the following criteria: AAMA/WDMA/CSA 101/I.S.2/A440-17 (NAFS - North American Fenestration Standard / Specification for windows, doors and skylights)

Skylights are suitable for use on flat roofs, for mounting on curbs and against a wall or parapet, flashing is to be provided by others. This skylight model provides flexibility to obtain openings by joining two or more skylights in a grid format.

- Custom sizes are available upon request

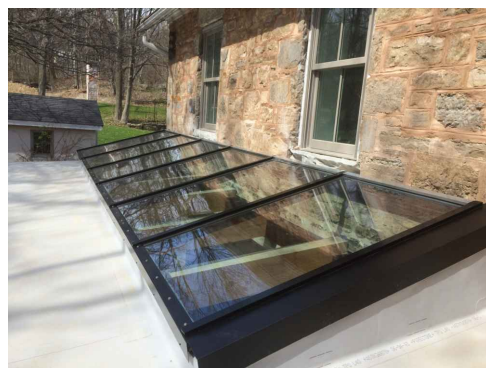

Model G-CU Available Sizes			
Model #	B x B Dimensions	Glazing Type	QTY
G-CU CUST.			
G-CU CUST.			
Glass Colours Available			
Glazing Type	Colour Code	Glazing Type	Colour Code
Clear/Low-E	Low-E	Clear/Laminated	Lami.
Bronze/Low-E	B/Low-E	Argon/Low-E	Low-E/Arg
Project:			
Contractor:		Approved By:	
Architect:		Date:	

Specifications:

Skylight shall be factory assembled Model No. _____ G-CU as manufactured by Artistic Skylight Domes Ltd. Vaughan, Ontario. Glazing shall consist of, sealed dual tempered glass of clear low-E over clear. The skylight shall consist of corrosion resistant extruded aluminum curb frame, 6063-T5 alloy, with heliarc welded corners. The skylight curb frame shall have insulation within the frame (to prevent thermal transfer to interior of building) and sloped pressure plates to provide drainage. Pressure plates are to be of mill finish (optional baked enamel), 6063-T5 aluminum alloy with heliarc welded corners.

