

Circular Glass Wall Mounted Skylight

Artistic Skylights conform to and exceed test requirements of the following criteria: AAMA/WDMA/CSA 101/I.S.2/A440-17 (NAFS - North American Fenestration Standard / Specification for windows, doors and skylights)

Circular skylights designed to be installed vertically in wall. These skylights mount directly into wall opening.

Colour Code

С

В

• Custom sizes are available upon request

Glazing Type


Clear

Bronze

		Model G	-CWM	Available	Sizes		7
Model #	Opening Diameter		Frame Diameter		Glazing Type	QTY	7
G-CWM 28	30"	(762 mm)	29¼"	(743 mm)			1
G-CWM 36	38"	(965 mm)	37¼"	(946mm)			1
G-CWM 42	44½"	(1130 mm)	43¾"	(1111 mm)			1
G-CWM 52	54"	(1372 mm)	53¼"	(1352 mm)			1
G-CWM 60	62½"	(1588 mm)	61¾"	(1568 mm)			1
G-CWM 72	74½"	(1892mm)	73¾"	(1873mm)			1
G-CWM 80	82½"	(2096 mm)	81¾"	(2076 mm)			1
G-CWM 96	97"	(2464 mm)	96¼"	(2445 mm)			7
G-CWM CUST.							Pr
G-CWM CUST.							\Box c
			lozina	Availabla			\vdash
Glazing Available							Ι.Δ

Glazing Type Low-E


Grey



Specifications:

Skylight shall be factory assembled Model No. G-CWM as manufactured by Artistic Skylight Domes Ltd. Vaughan, Ontario. Glazing shall consist of, sealed dual tempered glass of clear, bronze, or grey. Skylight shall consist of double aluminum frame with thermal break and condensation drainage. Frame shall be mill finish (optional baked enamel, or clear anodized), 6063-T5 aluminum alloy.

,
Project:
Contractor:
Architect:
Approved By:
Date:

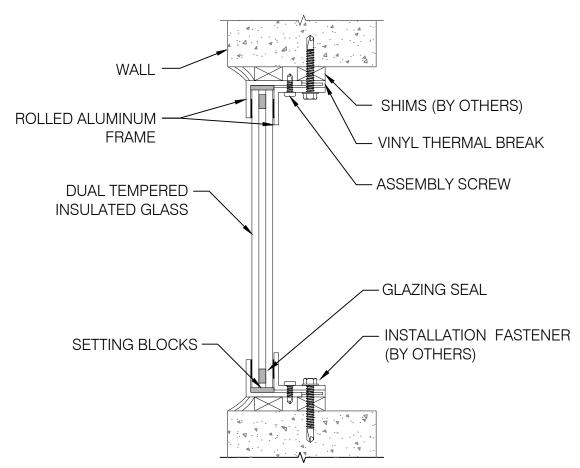

Colour Code

LE

G